

COLDEX

compressors

COMPACT ROTARY COMPRESSOR

M/HBP 2,8 - 3,6 - 6,5 - 11,1 cc

R134a 220-240V/50Hz

RTX COLDEX SERIES



RTX028Z.MH

RTX036Z.MH

RTX065Z.MH




RTX110Z.MH

Compressor Type	Hermetic Rotary	Hermetic Rotary	Hermetic Rotary	Hermetic Rotary
Refrigerant	R134a	R134a	R134a	R134a
Application	M/HBP (-15°C /15°C)	M/HBP (-15°C /15°C)	M/HBP (-15°C /15°C)	M/HBP (-15°C /15°C)
Displacement	2,8cc	3,6cc	6,5cc	11,1cc
Motor Type	RSIR/RSCR	RSIR/RSCR	RSIR/RSCR	RSIR/RSCR
Rated Voltage/Freq.	220-240/50Hz	220V/50-60Hz	220-240/50-60Hz	220-240/50Hz
Input Power (W)	125	170	285	440
Current (A)	0,58	0,8	1,52	2,0
Run Capacitor	4MF	5MF	7MF	12MF
COP (W/W)	2,2	2,15	2,42	2,96
Cooling Capacity W	275	365	690	1305
Cooling Capac. kcal/h	237	315	600	1135
Weight (Kg)	4.0	4,20	5,11	7,10
Height mm/mm	147	147	175	205
Noise	48dB	48dB	51dB	60dB

TEST CONDITIONS

(the running capacitor is supplied only on request)

Power Supp. 220V/50Hz Cond Temp. 54,4°C Evap. Temp. 7,2°C Amb.Temp. 35°C Suction Temp. 35°C Sub-Cooling Temp. 46,1°C

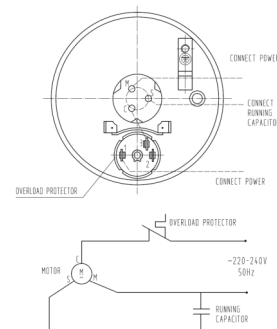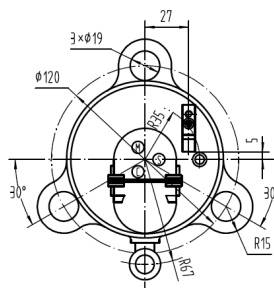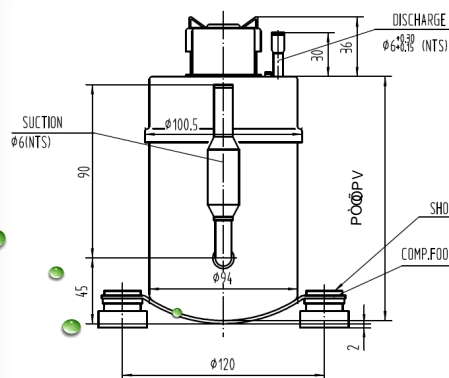

Imported by
PROCOLD SRL - 13043 - CIGLIANO (VC) Italy - C/so Umberto I, 58
 Tel (+39) 0161 424452 Fax (+39) 0161 424092
 info@procold.it www.procold.it